

EM24 W1



Energy analyzer for 1-phase and 3-phase systems, wireless M-Bus communication



Benefits

- **Time saving set-up**, by frontal joystick and selector.
- **Error-proof installation**, by self-power supply and phase sequence detection.
- **Easy variable scrolling**, by means of the front joystick.
- **Flexible installation**, by means of the direct connection up to 65 A or the connection of 5 A current transformers.
- **Accurate measurement**. It is compliant with the international accuracy standard IEC/EN62053-21, and the IEC/EN61557-12 performance requirements (active power and active energy).
- **Legal metrology**, guaranteed by the MID approval
- **Wireless communication**, wireless M-Bus version allows remote data collection when cabling is not possible due to cost or installation requirements.
- **Easy commissioning** of wireless communication thanks to the test function of the joystick and to transmission counter for diagnostics.

Description

Three-phase energy analyzer for DIN-rail mounting with configuration joystick, frontal selector and LCD display. Direct connection up to 65A or via current and voltage transformers. The wireless M-Bus communication is the perfect solution when cabling is not possible.

Applications

EM24 is the perfect solution in any application, specially in building and industrial automation where energy and main electrical variables monitoring is required.

EM24 is particularly suited for:

- energy efficiency monitoring
- cost allocation
- fiscal/legal sub-billing, where the wireless M-Bus version is the best choice for quick and easy installation without cables. Encryption ensures data security and safeguards confidentiality.

Main functions

- Measurement of energy consumption and main electrical variables of single-phase, two-phase or three-phase loads.
- Display of single phase measurements and total measurements.
- Easy connection function.
- Transmission of data via wireless M-Bus (868 MHz for the European market).
- Two wireless M-Bus versions: a compact model with internal antenna and a SMA connector model with external antenna (in case of metallic switchboard).

Main features

- TRMS measurements of distorted sine waves (voltages/currents)
- Data encryption (a unique key will be provided for any device in a sealed envelope included in the instrument box)
- Compliant with IEC/EN61557-12 performance requirements (active power and active energy)

Structure

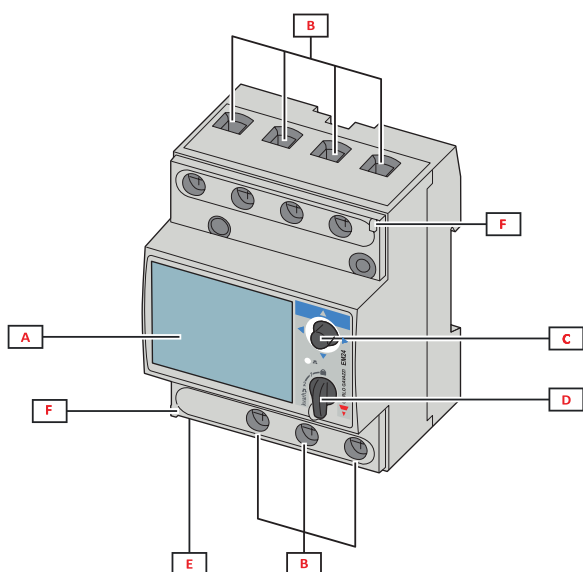


Fig. 1 Direct connection

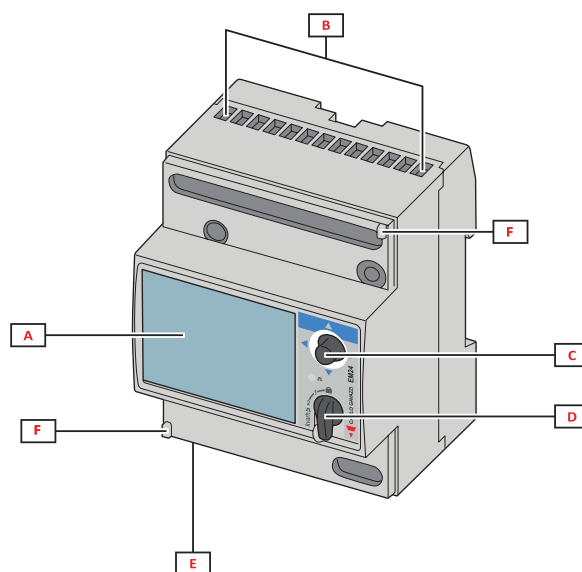


Fig. 2 CT connection

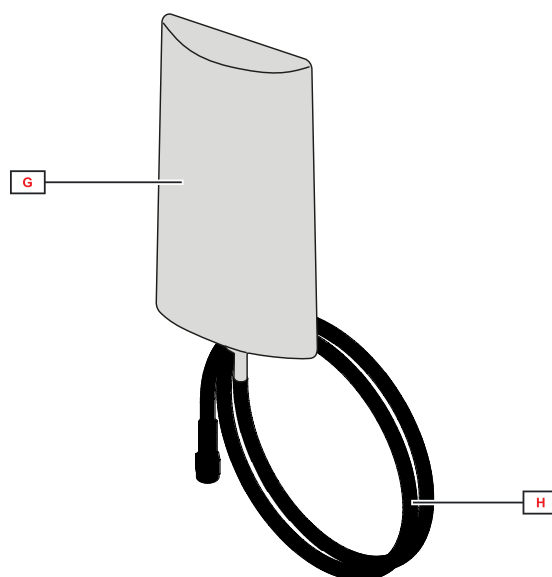



Fig. 3 External antenna (only for EM24DINAV...W1E...)

| Area | Description |
|------|--|
| A | LCD display |
| B | Voltage/current connections |
| C | Joystick |
| D | Selector with pin for MID seal (programming block) |
| E | Inputs/outputs or communication port |
| F | Pins for MID seal (protection covers included) |
| G | External antenna for wireless M-Bus communication |
| H | SMA connector cable (2 m) |

Features

General

| | |
|-------------------------------|---|
| Protection degree | Front: IP50. Terminals: IP20 |
| Terminals | Screw terminals AV2: Max.: 16 mm ² , min.: 2.5 mm ² (by cable lug) AV5: Max.: 1.5 mm ² |
| Overvoltage category | Cat. III |
| Utilisation category | UC2 |
| Pollution degree | 2 |
| Noise rejection (CMRR) | 100 dB, from 42 to 62 Hz |
| Mounting | DIN rail |
| Weight | 400 g (packaging included) 800 g with external antenna (packaging included) |

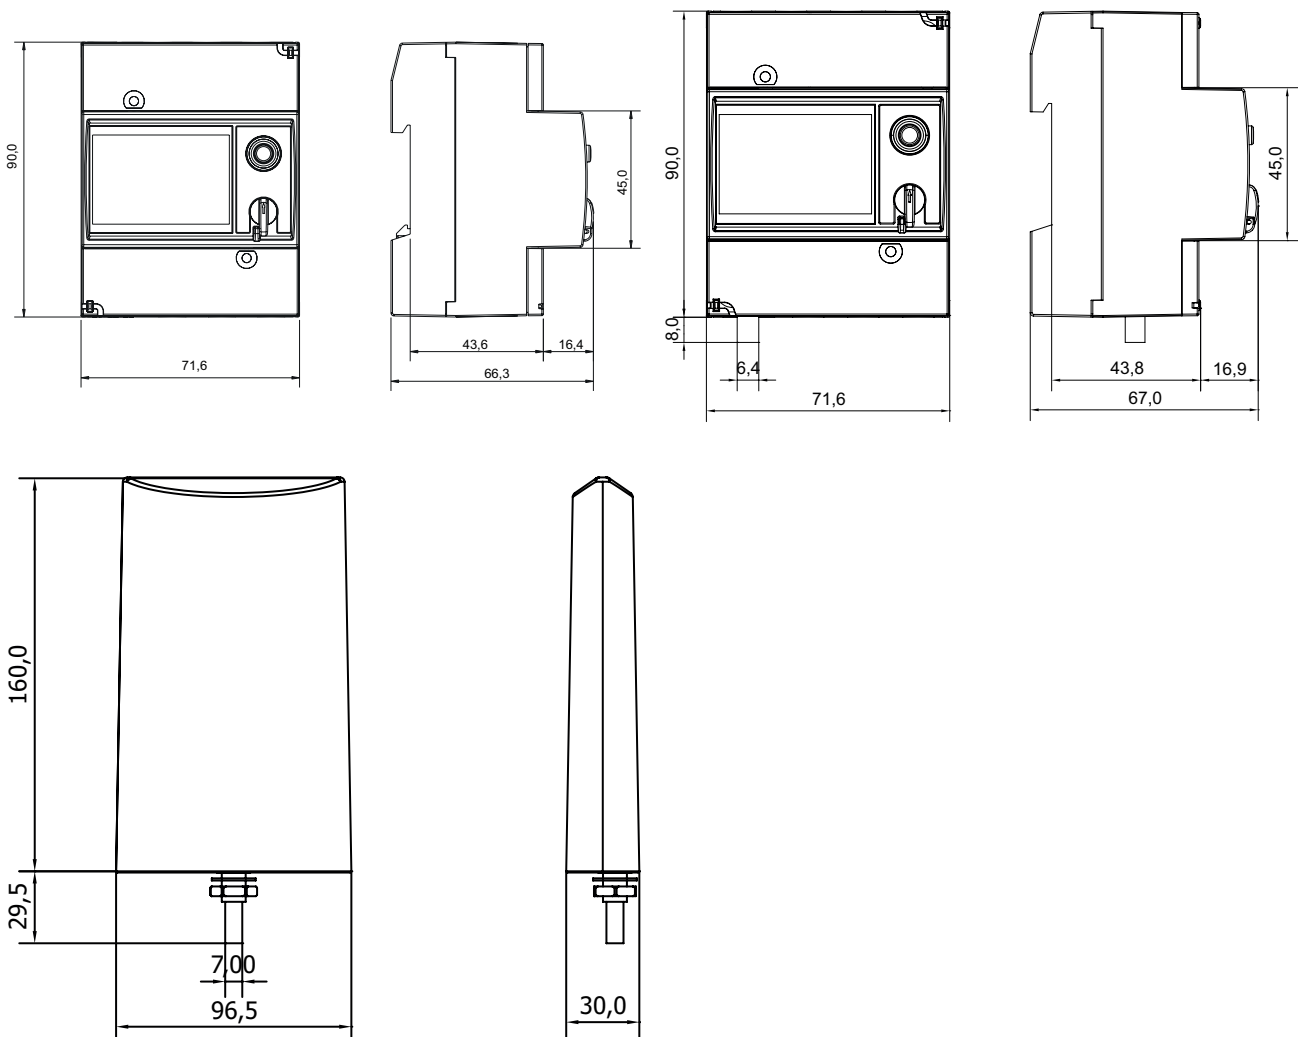



Environmental specifications

| | |
|-----------------------|--|
| Operating temperature | From -25 to +55 °C/from -13 to +131 °F |
| Storage temperature | From -30 to +70 °C/from -22 to +158 °F |

NOTE: R.H. < 90 % non-condensing @ 40 °C / 104 °F.

Compatibility and conformity

| | |
|------------|--|
| Directives | 2011/65/EU (RoHs), 2014/53/EU (RED) |
| Standards | Electromagnetic compatibility (EMC) - emissions and immunity: EN 62052-11 Electrical safety: EN 61010-1, EN 50470-1 (MID), UL 61010-1 Accuracy: EN 62053-21, EN 62053-23, EN 50470-3 (MID), IEC/EN61557-12 (active power and active energy, MID models only) |
| Approvals |   MID (PF only) |

Electrical specifications

| Voltage - MID models | | |
|---|-------------------------|-------|
| Voltage inputs | AV2 | AV5 |
| Voltage connection | Direct | |
| Rated voltage L-N (from Un min to Un max) | 133 to 230 V | 230 V |
| Rated voltage L-L (from Un min to Un max) | 230 to 400 V | 400 V |
| Voltage tolerance (*) | -20%, +15% | |
| Overload (**) | Continuous: 1.15 Un max | |
| Input impedance | Refer to "Power supply" | |
| Frequency | 50 Hz | |

| Voltage - Non MID models (according to IEC 62052-11) | | |
|--|---------------------------|--------------------------|
| Voltage inputs | AV2 | AV5 |
| Voltage connection | | |
| Rated voltage L-N (from Un min to Un max) | 120 to 277 V | 120 to 277 V |
| Rated voltage L-L (from Un min to Un max) | 208 to 480 V | 208 to 480 V |
| Voltage tolerance (*) | -20%, +15% | |
| Overload (**) | Continuous: 1.15 (Un max) | Continuous: 1.2 (Un max) |
| Input impedance | Refer to "Power supply" | >1600 kΩ |
| Frequency | 50/60 Hz | |

(*) reference range for stated accuracy

(**) max reference for no instrument damage



| Current | | |
|-------------------------|---|--|
| Current inputs | AV2 | AV5 |
| Current connection | Direct | Via CT |
| Rated current (In) | - | 5 A |
| Base current (Ib) | 10 A | - |
| Minimum current (Imin) | 0.5 A | 0.05 A |
| Maximum current (Imax) | 65 A | 10 A |
| Start-up current (Ist) | 0.04 A | 0.01 A |
| Overload | Continuous: 65 A @50 Hz For 10 ms: 1950 A @50 Hz | Continuous: 10 A @50 Hz For 500 ms: 200 A @ 50 Hz |
| Short circuit withstand | For 10 ms: 4500 A according to IEC 62052-31:2015 | - |
| Input impedance | < 1.1 VA | < 0.6 VA |
| Crest factor | 4 (Imax peak 92 A) | 3 (Imax peak 15 A) |

| Maximum CTxVT ratio | | |
|--------------------------|-----|------|
| Current inputs | AV2 | AV5 |
| Non-MID models except E1 | - | 4629 |
| Non-MID models: E1, W1 | - | 6975 |
| MID models except E1 | - | 3150 |
| MID models: E1, W1 | - | 2615 |

Power supply

| Non MID models | | |
|----------------|-------------------|-------------------|
| | AV2 | AV5 |
| Type | Self power supply | Self power supply |
| Consumption | 2.7VA /1.8W | |

| MID models | | |
|-------------|-------------------|-----|
| | AV2 | AV5 |
| Type | Self power supply | |
| Consumption | W1: 2.7VA /1.8W | |

Measurements

| | |
|----------|--|
| Method | TRMS measurements of distorted waveforms |
| Sampling | 1600 samples/s @50 Hz 1900 samples/s @60 Hz |

Available measurements

| Active energy | Unit | System | Phase | Note |
|----------------------|------|--------|-------|------|
| Imported (+) Total | kWh+ | • | • | |
| Imported (+) partial | kWh+ | • | - | |
| Exported (-) Total | kWh- | • | - | |



| Reactive energy | Unit | System | Phase |
|------------------------|--------|--------|-------|
| Imported (+) Total | kvarh+ | ● | - |
| Imported (+) partial | kvarh+ | ● | - |
| Exported (-) Total | kvarh- | ● | - |
| Imported (+) by tariff | kvarh+ | ● | - |

| Electrical variable | Unit | System | Phase |
|---------------------|------|--------|-------|
| Voltage L-N | V | ● | ● |
| Voltage L-L | V | ● | ● |
| Current | A | - | ● |
| DMD MAX | A | ● | - |
| Active power | kW | ● | ● |
| DMD | kW | ● | - |
| DMD MAX | kW | ● | - |
| Apparent power | kVA | ● | ● |
| DMD | kVA | ● | - |
| DMD MAX | kVA | ● | - |
| Reactive power | kvar | ● | ● |
| Power factor | PF | ● | ● |
| Frequency | Hz | ● | - |
| Run hour meter | h | ● | - |

Measurement mode

Depending on the APPLICATION setting, a different selection of variables is available on the display (see manual) and the energy calculation is worked out as follows:

- Standard: both kWh+ and kWh- are available;
- EC: easy connection function, the power is always integrated (both in case of positive and negative power).

In MID analyzers the calculation depends on the model:

- PFA: Easy connection, the total energy totalizer (kWh+) is certified according to MID;
- PFB: only the total positive totalizer (kWh+) is certified according to MID. The negative energy totalizer is available but not certified according to MID.

Energy metering

For every measuring interval time, the energies of the single phases are summed; according to the sign of the result, the positive (kWh+) or negative totalizer (kWh-) is increased.

Example:

P L1= +2 kW, P L2= +2 kW, P L3= -3 kW

Integration time = 1 hour

+kWh=(+2+2-3)x1h=(+1)x1h=1 kWh

-kWh=0 kWh

Measurement accuracy

| Current | AV2 | AV5 |
|--------------------|--|--|
| From 0.5 A to 2 A | $\pm(0.5\% \text{ rdg} + 3\text{dgt})$ | - |
| From 2 A to 65 A | $\pm(0.5\% \text{ rdg} + 1\text{dgt})$ | - |
| From 0.05 A to 1 A | - | $\pm(0.5\% \text{ rdg} + 3\text{dgt})$ |
| From 1 A to 10 A | - | $\pm(0.5\% \text{ rdg} + 1\text{dgt})$ |



| | | |
|---|---|--|
| Phase-phase voltage | AV2 | AV5 |
| In the range Un | $\pm(1\% \text{ rdg} + 1\text{dgt})$ | |
| Phase-neutral voltage | AV2 | AV5 |
| In the range Un | $\pm(0.5\% \text{ rdg} + 1\text{dgt})$ | |
| Active and apparent power | AV2 | AV5 |
| From 1.0 A to 65.0 A (PF=0.5L, 1, 0.8C) | $\pm(1\% \text{ rdg} + 1\text{dgt})$ | - |
| From 0.5 A to 1.0 A (PF=1) | $\pm(1.5\% \text{ rdg} + 1\text{dgt})$ | - |
| From 0.25 A to 10 A (PF=0.5L, 1, 0.8C) | - | $\pm(1\% \text{ rdg} + 1\text{dgt})$ |
| From 0.05 A to 0.25 A (PF=1) | - | $\pm(1.5\% \text{ rdg} + 1\text{dgt})$ |
| Reactive power | AV2 | AV5 |
| From 1.0 A to 2.0 A (sinϕ=0.5L, 0.5C) | $\pm(2.5\% \text{ rdg} + 1 \text{ dgt})$ | - |
| From 0.5 A to 1.0 A (sinϕ=1) | | |
| From 2.0 A to 65.0 A (sinϕ=0.5L, 0.5C) | $\pm(2\% \text{ rdg} + 1 \text{ dgt})$ | - |
| From 1.0 A to 65.0 A (sinϕ=1) | | |
| From 0.25 A to 0.5 A (sinϕ=0.5L, 0.5C) | - | $\pm(2.5\% \text{ rdg} + 1 \text{ dgt})$ |
| From 0.1 A to 0.25 A (sinϕ=1) | | |
| From 0.5 A to 10 A (sinϕ=0.5L, 0.5C) | - | $\pm(2\% \text{ rdg} + 1 \text{ dgt})$ |
| From 0.25 A to 10 A (sinϕ=1) | | |
| Active energy | Class 1 (EN62053-21) Class B (EN50470-3) (MID) | |
| Reactive energy | Class 2 (EN62053-23) | |
| Frequency | | |
| From 45 to 65 Hz | $\pm 0.1 \text{ Hz}$ | |

| Measurement accuracy according to IEC/EN61557-12 (MID models) | |
|--|---------------------|
| Active power | Performance class 1 |
| Active energy | Performance class 2 |

▶ Display

| | |
|-------------------------|--|
| Type | LCD |
| Refresh time | < 750 ms |
| Description | 3 rows: 1 st : 8 digits (7 mm) 2 nd : 4 digits (7 mm) 3 rd : 4 digits (7 mm) |
| Variable readout | Instantaneous: 4 digits, min: 0.000, max: 9999 Energy: 8 digits (imported), 7 digits (exported), min: 0.00, max: 99 999 999 |

 LED

| Model | CT*VT | Weight (kWh per pulse) |
|-------|-------------------|------------------------|
| AV5 | ≤ 7 | 0.001 |
| | $> 7 \leq 70.0$ | 0.01 |
| | $> 70 \leq 700.0$ | 0.1 |
| | > 700 | 1 |
| AV2 | N/A | 0.001 |

Communication ports

Wireless M-Bus (W1)

| | |
|---------------------------------|---|
| Protocols | Wireless M-Bus according to EN13757-3, EN13757-4 . OMS certified (*). |
| Frame format | A |
| Frequency | 868 MHz |
| Frame type | Selectable among the followin options: -1: kWh+ -2: kWh+, kvarh+, kvarh-, kW+ -3: kWh+, kvarh+, kvarh-, kW+, kvar+, kvar-, current by phase, voltage by phase, frequency -4: kWh+, kWh-, kvarh+, kvarh-, kW+, kW-, kvar+, kvar- |
| Mode | T1 or C1 |
| Encryption | No encryption, ENC-Mode 5 (security profile A) or ENC-Mode 7 (security profile B) |
| Transmission interval | Selectable from 10 s to 60 min |
| Configuration parameters | Frame type Transmission mode Communication interval Encryption enabling |
| Configuration mode | Via joystick |

Note (*): OMS certification is valid with the following settings:

- Frame type: 2 or 3
- Communication interval: 30 s, 1 m or 5 m
- Encryption enabled (security profile A or B)

Connection Diagrams

Three-phase with neutral (4-wire)

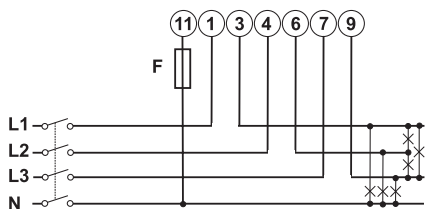


Fig. 4 AV2

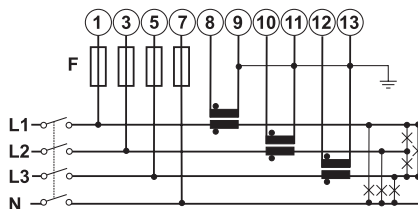


Fig. 5 AV5

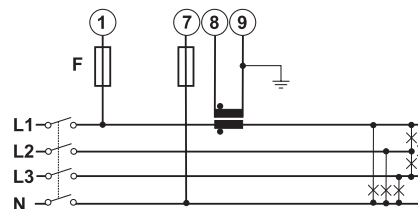


Fig. 6 AV5 balanced load

Three-phase without neutral (3-wire)

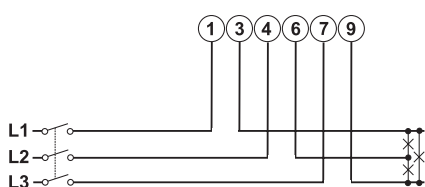


Fig. 7 AV2

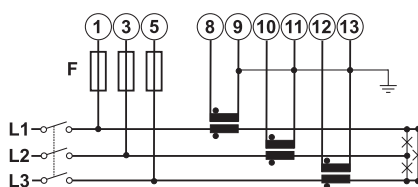


Fig. 8 AV5

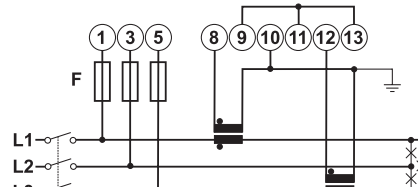


Fig. 9 AV5

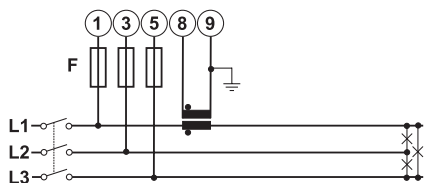


Fig. 10 AV5 balanced load

Single-phase (2-wire)

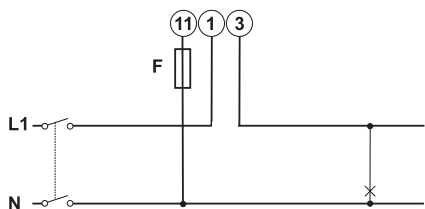


Fig. 11 AV2

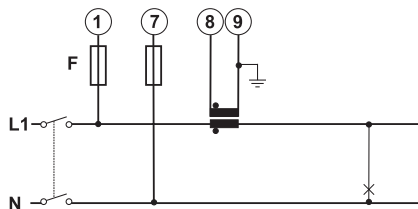


Fig. 12 AV5

Note: F=315 mA

MID connection diagrams

Three-phase with neutral (4-wire)

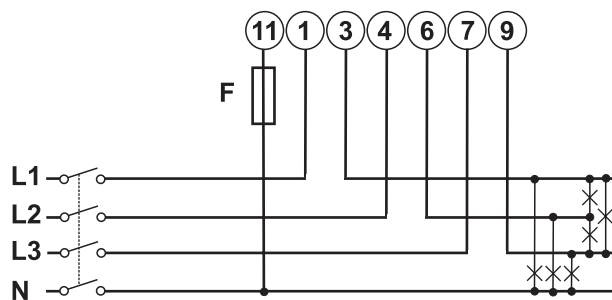


Fig. 13 AV2 3X

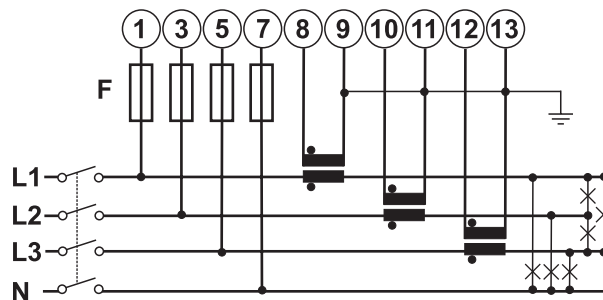


Fig. 14 AV5

Three-phase without neutral (3-wire) (W1 only)

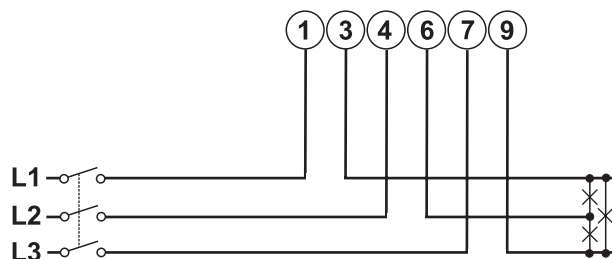


Fig. 15 AV2 3X

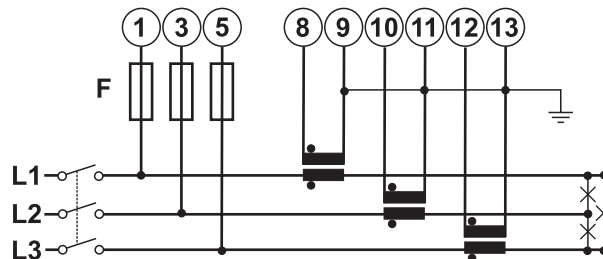


Fig. 16 AV5

Single-phase (2-wire) (W1 only)

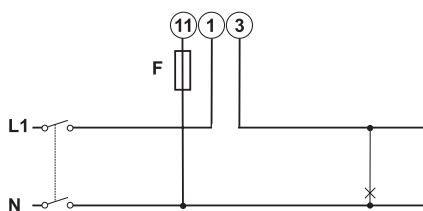


Fig. 17 AV2 1X

Note: F=315 mA

References

Order code

| Component name/part number | I/O communication | Voltage inputs | Current inputs | Power supply |
|----------------------------|---|--|-----------------|-------------------|
| EM24DIN AV5 3X W1 I X | Wireless M-Bus, internal antenna | From 120 to 277 V L-N From 208 to 480 V L-L | 5 (10) A via CT | Self power supply |
| EM24DIN AV5 3X W1 E X | Wireless M-Bus, external antenna | From 120 to 277 V L-N From 208 to 480 V L-L | 5 (10) A via CT | Self power supply |
| EM24DIN AV2 3X W1 I X | Wireless M-Bus, internal antenna | From 120 to 277 V L-N From 208 to 480 V L-L | 10 (65) A | Self power supply |
| EM24DIN AV2 3X W1 E X | Wireless M-Bus, external antenna | From 120 to 277 V L-N From 208 to 480 V L-L | 10 (65) A | Self power supply |
| EM24DIN AV2 1X W1 I X | Wireless M-Bus, internal antenna, 1-phase | From 120 to 277 V L-N | 10 (65) A | Self power supply |
| EM24DIN AV2 1X W1 E X | Wireless M-Bus, external antenna, 1-phase | From 120 to 277 V L-N | 10 (65) A | Self power supply |

MID models

| Component name/part number | I/O communication | Voltage inputs | Current inputs | Power supply |
|--|---|----------------------|-----------------|-------------------|
| EM24DIN AV5 3X W1 I PFA EM24DIN AV5 3X W1 I PFB | Wireless M-Bus, internal antenna | 230V L-N 400V L-L | 5 (10) A via CT | Self power supply |
| EM24DIN AV5 3X W1 E PFA EM24DIN AV5 3X W1 E PFB | Wireless M-Bus, external antenna | 230V L-N 400V L-L | 5 (10) A via CT | Self power supply |
| EM24DIN AV2 3X W1 I PFA EM24DIN AV2 3X W1 I PFB | Wireless M-Bus, internal antenna | 230V L-N 400V L-L | 10(65) A | Self power supply |
| EM24DIN AV2 3X W1 E PFA EM24DIN AV2 3X W1 E PFB | Wireless M-Bus, external antenna | 230V L-N 400V L-L | 10(65) A | Self power supply |
| EM24DIN AV2 1X W1 I PFA EM24DIN AV2 1X W1 I PFB | Wireless M-Bus, internal antenna, 1-phase | 230V L-N | 10(65) A | Self power supply |
| EM24DIN AV2 1X W1 E PFA EM24DIN AV2 1X W1 E PFB | Wireless M-Bus, external antenna, 1-phase | 230V L-N | 10(65) A | Self power supply |


- PFA: Easy connection, the total energy totalizer (kWh+) is certified according to MID;
- PFB: only the total positive totalizer (kWh+) is certified according to MID. The negative energy totalizer is available but not certified according to MID.

Further reading

| Information | Where to find it |
|-------------------------------|--|
| User manual - W1 | www.productselection.net/MANUALS/UK/em24_W1_im_use.pdf |
| Installation instruction - W1 | www.productselection.net/MANUALS/UK/em24_W1_im_inst.pdf |

CARLO GAVAZZI compatible components

| Purpose | Component name/part number | NOTES |
|--|----------------------------|------------------------|
| Collect data from wireless M-Bus devices and transmit data via Modbus TCP/IP | SIU-MBM-02 | See relevant datasheet |



COPYRIGHT ©2021

Content subject to change. Download the PDF: www.productselection.net