


PV monitoring diagram


SOFTWARE Eos-Server - PV multisites management



Recording and analysis

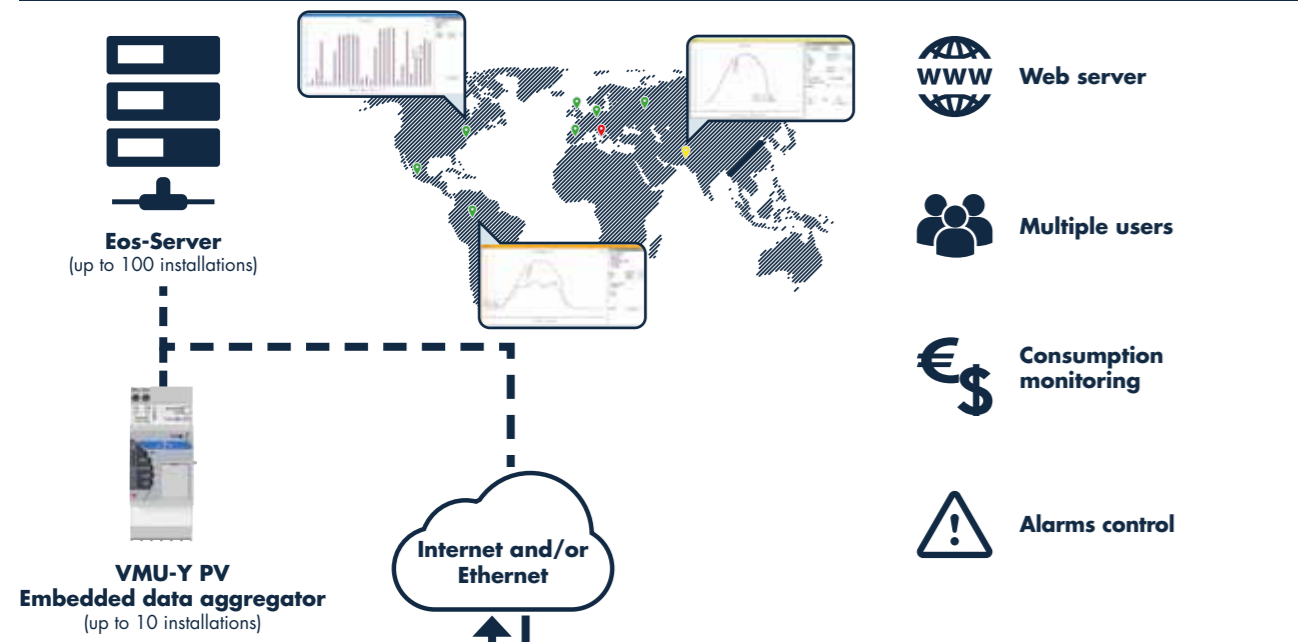

Measurement and control

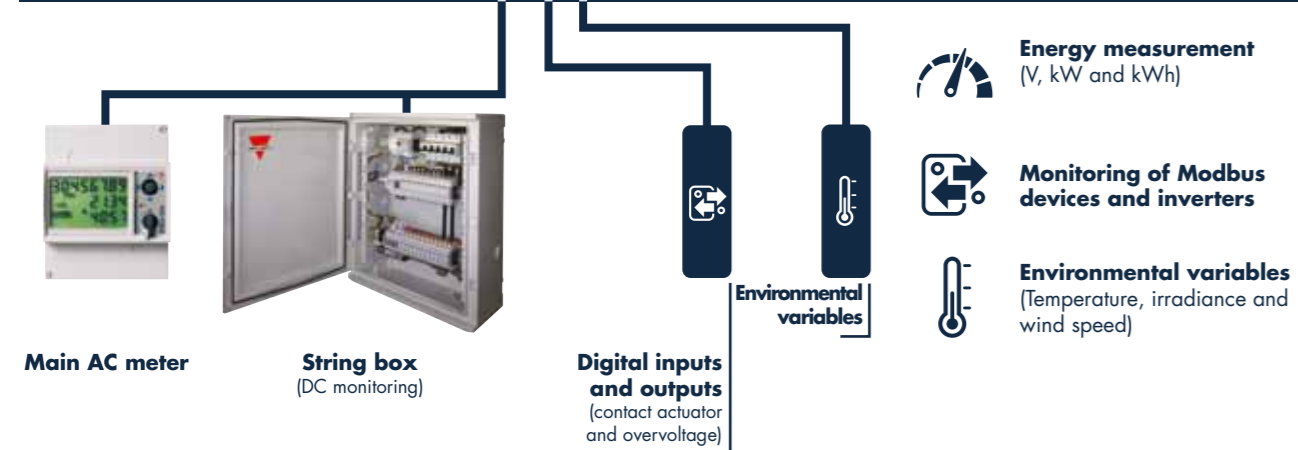

OUR SALES NETWORK IN EUROPE

<p>AUSTRIA Carlo Gavazzi GmbH Ketzerergasse 374, A-1230 Wien Tel: +43 1 888 4112 Fax: +43 1 889 10 53 office@carlogavazzi.at</p>	<p>FRANCE Carlo Gavazzi Sarl Zac de Paris Nord II, 69, rue de la Belle Etoile, F-95956 Roissy CDG Cedex Tel: +33 1 49 38 98 60 Fax: +33 1 48 63 27 43 french.team@carlogavazzi.fr</p>	<p>ITALY Carlo Gavazzi SpA Via Milano 13, I-20020 Lainate Tel: +39 02 931 761 Fax: +39 02 931 763 01 info@gavazziacbu.it</p>	<p>SPAIN Carlo Gavazzi SA Avda. Iparraguirre, 80-82, E-48940 Leizaola (Bizkaia) Tel: +34 94 480 4037 Fax: +34 94 431 6081 gavazzi@gavazzi.es</p>
<p>BELGIUM Carlo Gavazzi NV/SA Mechelsesteenweg 311, B-1800 Vilvoorde Tel: +32 2 257 4120 Fax: +32 2 257 41 25 sales@carlogavazzi.be</p>	<p>GERMANY Carlo Gavazzi GmbH Pfnorstr. 10-14 D-64293 Darmstadt Tel: +49 6151 81000 Fax: +49 6151 81 00 40 info@gavazzi.de</p>	<p>NETHERLANDS Carlo Gavazzi BV Wijkermeerweg 23, NL-1948 NT Beverwijk Tel: +31 251 22 9345 Fax: +31 251 22 60 55 info@carlogavazzi.nl</p>	<p>SWEDEN Carlo Gavazzi AB V.a Kyrkogatan 1, S-652 24 Karlstad Tel: +46 54 85 1125 Fax: +46 54 85 11 77 info@carlogavazzi.se</p>
<p>DENMARK Carlo Gavazzi Handel A/S Over Hadstenvej 40, DK-8370 Hadsten Tel: +45 89 60 6100 Fax: +45 86 98 15 30 handel@gavazzi.dk</p>	<p>GREAT BRITAIN Carlo Gavazzi UK Ltd 4.4 Frimley Business Park, Frimley, Camberley, Surrey GU16 7SG Tel: +44 1 276 854 110 Fax: +44 1 276 682 140 sales@carlogavazzi.co.uk</p>	<p>NORWAY Carlo Gavazzi AS Melkeveien 13, N-3919 Porsgrunn Tel: +47 35 93 0800 Fax: +47 35 93 08 01 post@gavazzi.no</p>	<p>SWITZERLAND Carlo Gavazzi AG Verkauf Schweiz/Vente Suisse Sumpfstrasse 3, CH-6312 Steinhausen Tel: +41 41 747 4535 Fax: +41 41 740 45 40 info@carlogavazzi.ch</p>
<p>FINLAND Carlo Gavazzi OY AB Petaksentie 2-4, FI-00630 Helsinki Tel: +358 9 756 2000 Fax: +358 9 756 20010 myynti@gavazzi.fi</p>	<p>PORTUGAL Carlo Gavazzi Lda Rua dos Jerónimos 38-B, P-1400-212 Lisboa Tel: +351 21 361 7060 Fax: +351 21 362 13 73 carlogavazzi@carlogavazzi.pt</p>		

OUR SALES NETWORK IN THE AMERICAS

<p>USA Carlo Gavazzi Inc. 750 Hastings Lane, Buffalo Grove, IL 60089, USA Tel: +1 847 465 6100 Fax: +1 847 465 7373 sales@carlogavazzi.com</p>	<p>CANADA Carlo Gavazzi Inc. 2660 Meadowvale Boulevard, Mississauga, ON L5N 6M6, Canada Tel: +1 905 542 0979 Fax: +1 905 542 22 48 gavazzi@carlogavazzi.com</p>	<p>MEXICO Carlo Gavazzi Mexico S.A. de C.V. Calle La Montaña no. 28, Fracc. Los Pastores Naucalpan de Juárez, EDOMEX CP 53340 Tel & Fax: +52.55.5373.7042 mexicosales@carlogavazzi.com</p>	<p>BRAZIL Carlo Gavazzi Automação Ltda. Av. Francisco Matarazzo, 1752 Conj 2108 - Barra Funda - São Paulo/SP Tel: +55 11 3052 0832 Fax: +55 11 3057 1753 info@carlogavazzi.com.br</p>
---	--	---	--

OUR SALES NETWORK IN ASIA AND PACIFIC

<p>SINGAPORE Carlo Gavazzi Automation Singapore Pte. Ltd. 61 Tai Seng Avenue #05-06 UE Print Media Hub Singapore 534167 Tel: +65 67 466 990 Fax: +65 67 461 980 info@carlogavazzi.com.sg</p>	<p>MALAYSIA Carlo Gavazzi Automation (M) SDN. BHD. D12-06-G, Block D12 Pusat Perdagangan Dana 1, Jalan PJU 1A/46, 47301 Petaling Jaya, Selangor, Malaysia. Tel: +60 3 7842 7299 Fax: +60 3 7842 7399 sales@gavazzi-asia.com</p>	<p>CHINA Carlo Gavazzi Automation (China) Co. Ltd. Unit 2308, 23/F, News Building, Block 1,1002 Middle Shennan Zhong Road, Shenzhen, China Tel: +86 755 83699500 Fax: +86 755 83699300 sales@carlogavazzi.cn</p>	<p>HONG KONG Carlo Gavazzi Automation Hong Kong Ltd. Unit 3 12/F, Crown Industrial Bldg., 106 How Ming St., Kwun Tong, Kowloon, Hong Kong Tel: +852 23041228 Fax: +852 23443689</p>
---	--	---	--

OUR COMPETENCE CENTRES AND PRODUCTION SITES

<p>DENMARK Carlo Gavazzi Industri A/S Hadsten</p>	<p>MALTA Carlo Gavazzi Ltd Zejtun</p>	<p>ITALY Carlo Gavazzi Controls SpA Belluno</p>	<p>LITHUANIA Uab Carlo Gavazzi Industri Kaunas Kaunas</p>
--	--	--	--

HEADQUARTERS

Carlo Gavazzi Automation SpA
Via Milano, 13
I-20020 - Lainate (MI) - ITALY
Tel: +39 02 931 761
info@gavazziautomation.com



Overview

PV MONITORING OVERVIEW ENG. REV.00 11/15
Specifications are subject to change without notice. Illustrations are for example only.

PV monitoring

Overview

PV monitoring



Web server and datalogger	Embedded aggregation server	Cloud multi-site aggregation server
---------------------------	-----------------------------	-------------------------------------



VMU-C PV (Eos-Web)

- Dimensions: 2 DIN modules
- Micro PC with web server and web service capability
- Data and event logging capability
- Internal 4GB memory and 16GB SDHC card back-up memory (on request)
- Variables shown as graphs and numbers in formatted tables
- All data exports on HTML format compatible with Excel or other spread sheets
- Management up to 11 Eos-Array, 11 inverters and 11 energy meters

MAIN FEATURES

- Efficiency calculation and control on different levels: string, BOS and Performance ratio and Yield indices
- Alarms control with automatic e-mailing and SMS management by means of VMU-D



VMU-Y PV

- 2-DIN size; DIN-rail mounting
- Multi-site PV monitoring management
- Power supply from 24 VDC (+/- 20%)
- 2 USB ports (for data backup and connection backup)
- 1 SD port (for backup)
- UL approved

MAIN FEATURES

- Photovoltaic plant/portfolio management
- Data analysis and benchmark
- Data and event logging
- Data aggregation in plants and virtual plants
- All data exported in format compatible with Excel or other spread sheets
- Alarms management
- Database replication up to 10 VMU-C PV



Eos-Server

- Software solution for photovoltaic plant management
- Multi-site PV monitoring management
- Flexible and scalable architecture
- VMware® Technology compatibility - in-house or cloud installation

MAIN FEATURES

- Photovoltaic plant/portfolio management
- Data analysis and benchmark
- Data and event logging
- Data aggregation in plants and virtual plants
- All data exported in format compatible with Excel or other spread sheets
- Alarms management
- Database replication up to 100 VMU-C PV

Solar monitoring solution	USB dongle connection modules
---------------------------	-------------------------------



Eos-Array / Eos-Array Lite

- Modular local monitoring system for PV plant
- Up to 16 DIN module configuration
- Eos-ArraySoft, freeware configuration software
- Eos-Array can manage in addition to VMU-M unit up to: 1 VMU-P, up to 15 VMU-S and up to 7 VMU-O for a total of maximum 15 units

MAIN FEATURES

- The Eos-Array solution can be composed of: VMU-M, the master unit and data logger; VMU-S, the string controller; VMU-P, the environment variable unit and VMU-O, the I/O unit
- Eos-Array Lite is the answer to those photovoltaic applications where a less sophisticated monitoring solution is needed



VMU-D

- Dimensions: 2 DIN modules
- Compatible with Carlo Gavazzi approved 3G/4G USB modems
- Power supply 24 VDC (+/- 20%)
- Suitable for use with VMU-C and VMU-Y

MAIN FEATURES

- 3G or 4G Mobile Internet connectivity
- SMS alerting
- SMS commands

PV monitoring

Surge arresters	Surge arresters	Surge arresters
-----------------	-----------------	-----------------



DSB / DSF

- Dimensions: 90 x 36 x 72 mm
- Class II
- Available for PV and AC installations
- Models for communication lines
- Optional remote monitoring
- For DIN rail mounting

MAIN FEATURES

- NO backup fuse required
- Appr. Acc. to IEC61643-11 and UTE C61-740-51
- Complies with prEN50539-11



DSC

- Dimensions: 90 x 72 x 70 mm
- Class I and II
- Protective element: High Energy MOV
- High surge discharge rating: Iimp = 12.5 kA per pole
- Housing: compact design

MAIN FEATURES

- Specifically designed for PV installations with or without LPS (Lightning Protection System)
- Location of use: photovoltaic system - PV module side



DSB51XXDP

- Dimensions: 90 x 12 x 71.5 mm DIN-rail housing
- 15 VDC nominal voltage
- 10 kA Inom, 20 kA Imax
- Rated spark overvoltage 184V to 276V
- C1/C2/C3 according to IEC 61643-21

MAIN FEATURES

- Designed for Dupline® communication lines
- Three stage topology with dual GDT
- Socket with replaceable cartridge

Switching power supply	DIN rail DC/DC converter	3-phase energy analysers
------------------------	--------------------------	--------------------------



SPM3

- DIN rail housing
- Universal input 90-264 VAC / 120- 370 VDC
- Single phase and battery charger versions available
- Approvals/Marks: UL, cUL listed and TÜV/CE approved

MAIN FEATURES

- Operating temperature w/ a derating -25°C to +60°C
- Short circuit and Overload protection
- High efficiency (up to 89%)



DCC 24151K-D

- DIN rail mounting
- Ultra wide input: 100 – 1000 VDC
- 24VDC output 15W
- High efficiency up to 80%
- Wide temperature range -40 to +70° C
- Output over voltage and short circuit protection
- Reverse input protection

MAIN FEATURES

- Widely used in Photovoltaic power generation with high voltage inverters
- It provides stable operating voltage to low voltage DC equipment



EM24 DIN

- Dimensions: 4 DIN modules
- 3-phase energy analyser with direct connection
- Current input for direct connection up to 65A or external CT connection
- Class 1 (kWh) acc. to EN62053-1
- Pulse open collector output
- Modbus communication port

MAIN FEATURES

- Direct or external CT measurement in a very compact housing to save space
- Suitable for measuring generated and consumed energy
- MID Annex D certification available

PV monitoring

Irradiation sensors	Pyranometers
---------------------	--------------



PVS-1

- Dimensions: 57 x 48 x 15 mm (not including clamp)
- Sensor type: crystalline silicon cell
- No need for external power supply (self-powered)
- Long lasting 3% accuracy, thanks to a special antiageing treatment
- Calibration process according to IEC 60904-2 and 60904-4
- Two available versions: 4-20 mA output / 0-80 mV output

MAIN FEATURES

- Long life rugged aluminium case
- UV resistant resin encapsulation
- Fast installation, thanks to the clamping system designed to easily fit the photovoltaic module's frame



PVS-2A

- Dimensions: 162 x 215 x 40 mm (not including clamp)
- 2nd class thermopile pyranometer
- 4-20 mA output for reliable connections
- Calibration certificate according to ISO 9847

MAIN FEATURES

- Compact and rugged IP67 aluminium case
- Compliant with WMO (World Meteorological Organization) for environmental monitoring
- Compliant with ISO9060 and IEC17025 for photovoltaic monitoring

Temperature sensors	Anemometers
---------------------	-------------



TEMPSOL / IKE20001K

- Temperature Pt100 or Pt1000 (TEMPSOL)
- Temperature Pt1000 (IKE20001K)
- ±0.3°C connection type
- 2 wire connection type

MAIN FEATURES

- Specifically design to measure the temperature of PV panels (TEMPSOL)
- For air temperature measurement in PV plants (IKE20001k)



DWS-V

- Opto-electronic detection
- Rotor diameter: 145 mm
- Rotor: black painted stainless steel
- PNP & NPN open collector output in one unit
- Measuring range 2 to 30 m/s
- Current source output 10 to 28 VDC supply

MAIN FEATURES

- All inputs and outputs are protected against reverse polarity and transients
- Dust sealed stainless steel ball bearing