

Limit Switches - Prewired Type Plastic Body




- Double Insulation □ (for thermoplastic type)
- Sealed with epoxy resin at the base of the box
- Degree of protection IP67
- Thermoplastic material body
- Positive Opening Operation →
- Minimum Actuation Force/Torque
- Minimum Force to achieve Positive Opening Operation
- Precise operating points (consistency)
- Immune to electromagnetic disturbances
- Zb type contact blocks
- Current Ith = 10A
- Rated insulation voltage Ui = 500V
- CE, UL (upon request)
- Conform with IEC 947-5-1 (EN 60947-5-1)

Product Description

They are developed with very compact size, to enable its mounting on machine's moving member during adverse environmental conditions and controlling their position.

Ordering Key

PS21M-CS11RT-T00

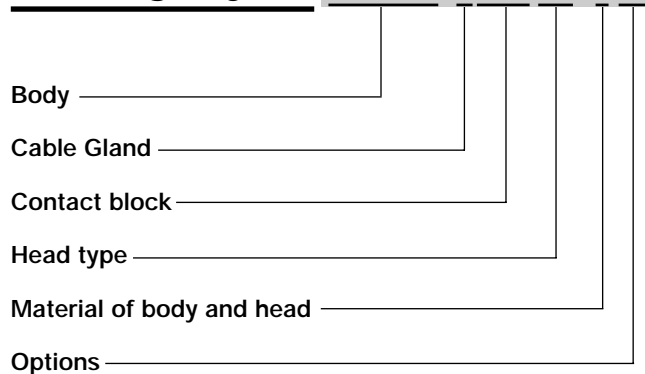

Description of the key codes

Body

PS21M | PS 30mm (fix 20mm) 1m cable lateral side (prewired)

Cable Gland

C | Prewired - std cable

Contact block

S11 | 1NO+1NC snap(+)
T11 | 1NO+1NC slow(+)

Material of body and head

T | Thermoplastic Body and Metal head

Options

00 | no option
OL | with fixing nuts (only with head type P0, PR, PY, P9, P8)

Head type

BE | nylon roller ext bent LEVER
BO | ball roller bent LEVER
BR | nylon roller int bent LEVER
L3 | adj square (3x3) steel rod LEVER
LA | adj Ø3 rod LEVER stainless steel rod
LB | nylon actuator with stainless steel spring
LF | adj fiberglass rod LEVER Ø3
LG | adj fiberglass rod LEVER Ø6
LN | adj nylon rod LEVER
LP | multidir nylon actuator with stainless steel spring
LS | stainless steel spring multidir actuator
LW | Stainless stell spring multidir actuator (cat Whisker)
LZ | Stainless stell spring actuator
P0 | metal plain PLUNGER
P8 | nylon cross roller PLUNGER with fixing nuts
P9 | cross metal roller PLUNGER
PH | metal PLUNGER +gasket
PR | metal roller PLUNGER
PY | nylon roller PLUNGER
R1 | adj LEVER with nylon roller
R2 | adj LEVER with stainless stell roller
RM | metal roller LEVER
RO | roller LEVER steel ball bearing
RS | metal roller LEVER
RT | nylon roller LEVER
W1 | adj LEVER with Ø50 rubber roller

Technical Data

Standards

Certifications – Approvals

Air temperature near the device

- during operation
- for storage

°C -25 ... +70
°C -40 ... +70

Mounting positions

Protection against electrical shocks (acc.to IEC 536)

Degree of protection (according to IEC 529 and EN 60 529)

Degree of protection (according to UL50)

IP67

Devices conform with international IEC 947-5- and European EN 60-947-5- standards
UL (upon request)

All positions are authorized

Class II

IP67

Type 1 enclosure ("indoor use only")

Electrical Data

Rated insulation voltage U_i

-according to IEC 947-1 and EN 60-947-1

-according to UL 508, CSA C22-2 n°14

Rated impulse withstand voltage U_{imp}

kV

(according to IEC 60947-1 and EN 60947-1)

Conventional enclosed thermal current I_{th}

A

(according to IEC 60947-1 and EN 60947-5-1) ($\theta \leq 40^\circ\text{C}$)

Short-circuit protection - gG type fuses

A

Rated operational current

I_e / **AC-15** - acc.to IEC 60947-5-1

24Vac (50/60 Hz) A

120Vac (50/60 Hz) A

240Vac (50/60 Hz) A

400V (degree of pollution 3)

B 300, R 300

4

5

6

5.0

3.0

1.5

I_e / **DC-13** - acc.to IEC 60947-5-1

24Vdc A

110Vdc A

250Vdc A

1.1

0.22

0.1

Electrical durability (according to IEC 60497-5-1 annex C)

- max. switching frequency Cycles/h

- load factor

Mechanical durability

Utilization categories AC-15 and DC-13 (see curves and value below)

3600

0.5

10 millions of operations

Diagram for snap action contact:





Diagram for slow action contact:



Electrical durability for DC-13 utilization category


Power breaking for a durability of 5 million operating cycles		
	Snap action	Slow action
Voltage 24V	9,5W	12W
Voltage 48V	6,8W	9W
Voltage 110V	3,6W	6W

Limit Switches - Miniature Type (PS21M) Plastic Body IP67




Cable Characteristics

Pre-wired
 cable: PVC 4x0.75 mm²
 Length: 1m
 (Different lengths available on request)

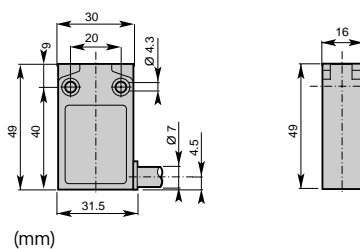

▲ Contact block (Zb type)



	S11	T11

Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 0.5ms
 Min. force or torque 15N / 30Nm
 Weight 125g

Plain Plunger
 Code PS21M-C ▲P0-T00

	S11	T11

Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 0.1ms
 Min. force or torque 10N / 30Nm
 Weight 130g

Roller Plunger
 Code Metal roller PS21M-C ▲PR-T00
 Nylon roller PS21M-C ▲PY-T00

	S11	T11


Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 0.1ms
 Min. force or torque 10N / 30Nm
 Weight 130g

Cross roller plunger
 Code Metal roller PS21M-C ▲P9-T00
 Nylon roller PS21M-C ▲P8-T00

	S11	T11

Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 0.5ms
 Min. force or torque 15N / 30Nm
 Weight 130g


Plain plunger with dust protection cup
 Code PS21M-C ▲PH-T00

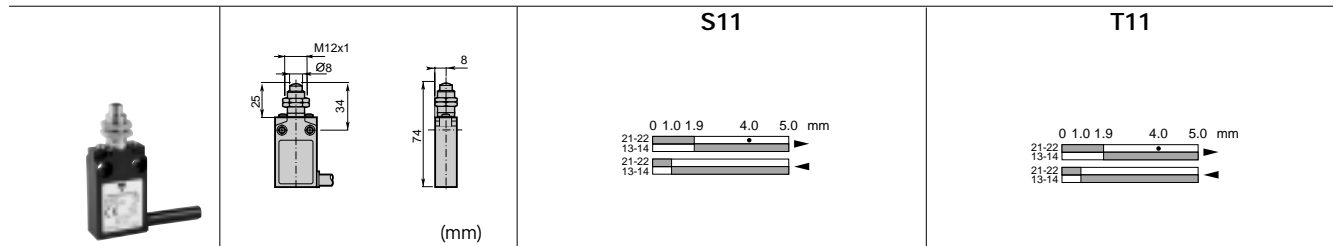

Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 0.5ms
 Min. force or torque 15N / 30Nm
 Weight 140g

S11
 Pain plunger with fixing nuts
 Code


T11
 PS21M-C \blacktriangle P0-T0L

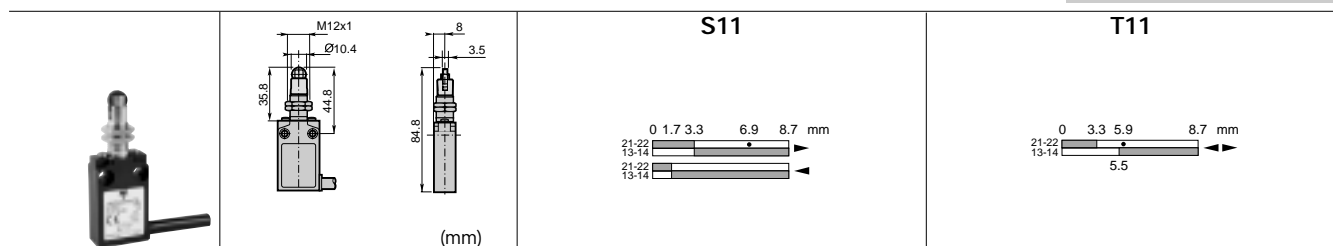

Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 0.1ms
 Min. force or torque 10N / 30Nm
 Weight 145g

S11
 Roller plunger with fixing nuts
 Code metal roller
 nylon roller


T11
 PS21M-C \blacktriangle PR-T0L
 PS21M-C \blacktriangle PY-T0L

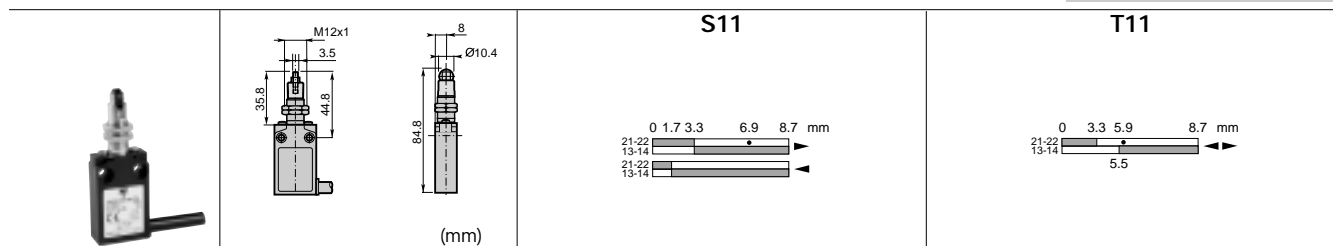

Conformity / \rightarrow / \rightarrow
 Max. Actuation speed 0.1ms
 Min. force or torque 10N / 30Nm
 Weight 145g

S11
 Cross roller plunger with fixing nuts
 Code metal roller
 nylon roller


T11
 PS21M-C \blacktriangle P9-T0L
 PS21M-C \blacktriangle P8-T0L

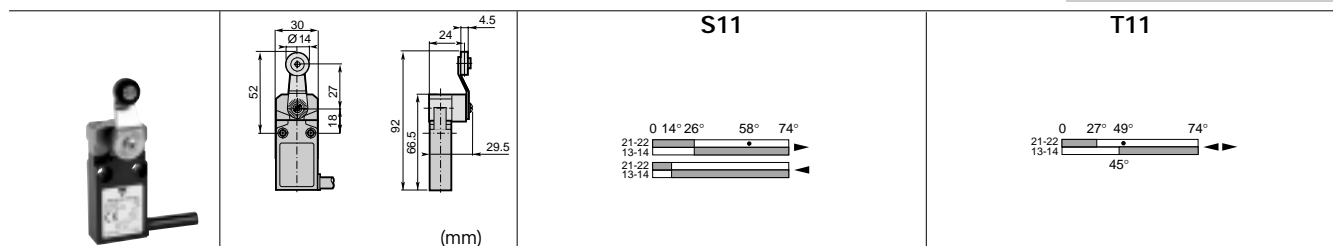

Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 1.5ms
 Min. force or torque 0.08N / 0.28Nm
 Weight 175g

S11
 Ø14 roller lever
 Code nylon roller
 metal roller
 ball bearing

T11
 PS21M-C \blacktriangle RT-T00
 PS21M-C \blacktriangle RS-T00
 PS21M-C \blacktriangle RO-T00

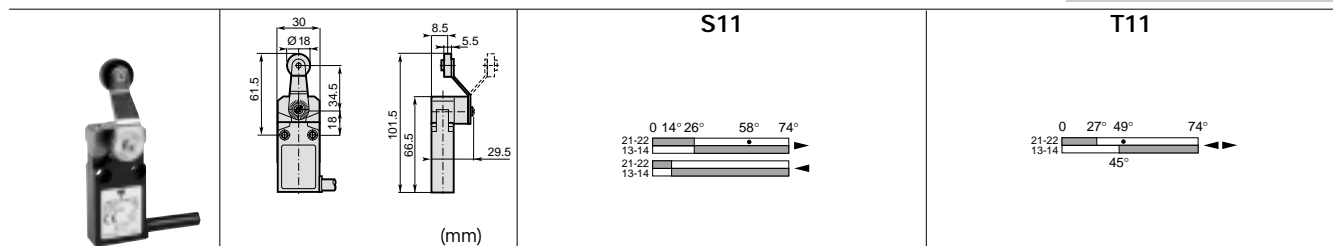

Conformity / \rightarrow (NC) / \rightarrow
 Max. Actuation speed 1.5ms
 Min. force or torque 0.08N / 0.28Nm
 Weight 180g

S11
 Ø18 nylon roller lever
 Code


T11
 PS21M-C \blacktriangle BR-T00

Limit Switches - Miniature Type (PS21M) Plastic Body IP67





Cable Characteristics


Pre-wired
 cable: PVC 4x0.75 mm²
 Length: 1m
 (Different lengths available on request)

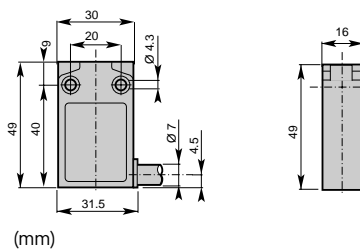


▲ Contact block (Zb type)

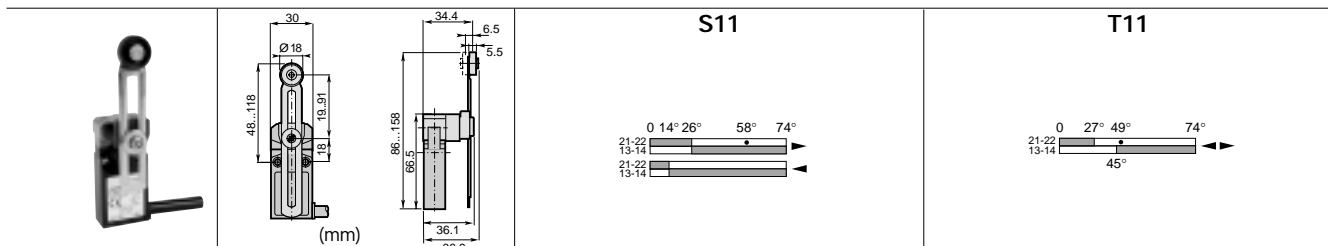


Conformity / (NC)	/	Adjustable lever with Ø18 nylon roller	
Max. Actuation speed	1.5ms	Code	PS21M-C ▲R1-T00
Min. force or torque	0.08N / 0.28Nm		
Weight	190g		

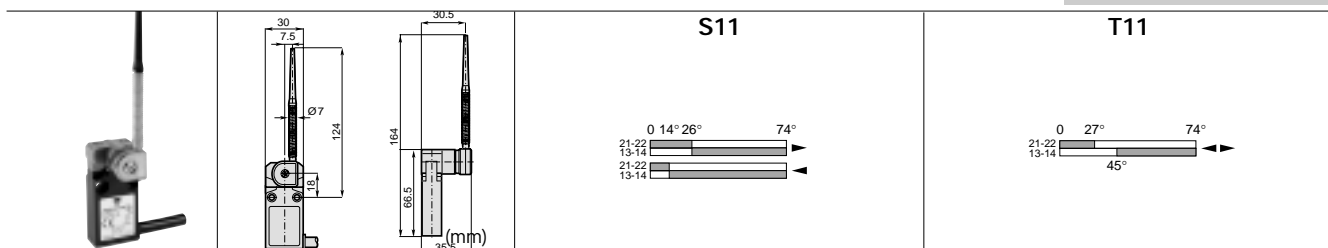


Conformity / (NC)	/	Nylon actuator with stainless steel spring	
Max. Actuation speed	1.5ms	Code	PS21M-C ▲LB-T00
Min. force or torque	0.08N / -		
Weight	190g		

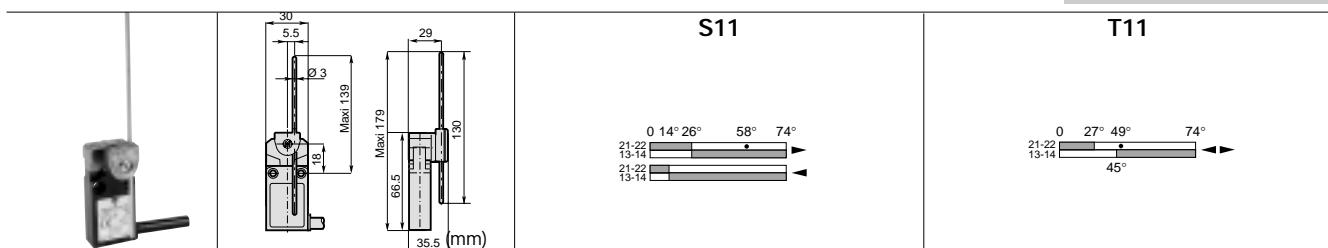

Conformity / (NC)	/	Adjustable rod lever	
Max. Actuation speed	1.5ms	Code	PS21M-C ▲LA-T00 PS21M-C ▲LF-T00 PS21M-C ▲L3-T00
Min. force or torque	0.08N / 0.28Nm		
Weight	185g		

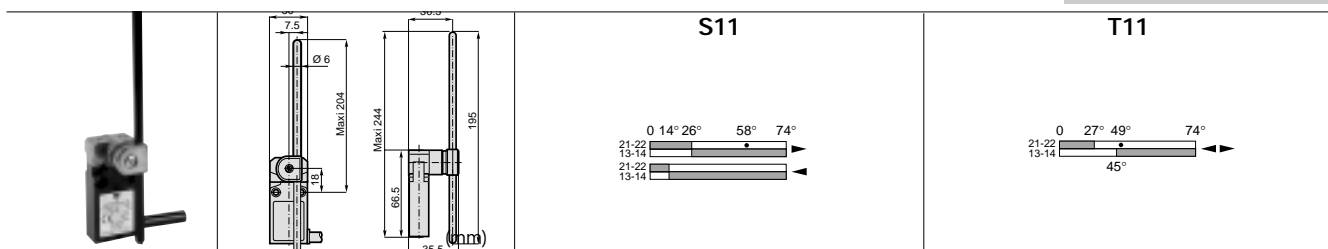


Conformity / (NC)	/	Adjustable Ø6 rod lever	
Max. Actuation speed	1.5ms	Code	PS21M-C ▲LN-T00 PS21M-C ▲LG-T00
Min. force or torque	0.08N / 0.28Nm		
Weight	200g		

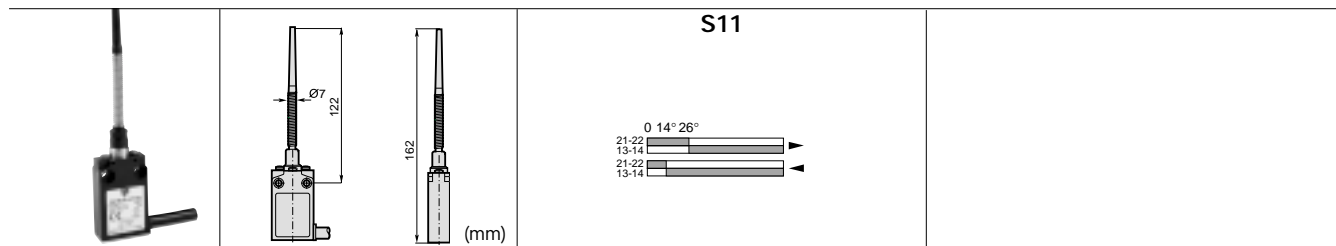

Conformity / \rightarrow (NC)	/ \rightarrow
Max. Actuation speed	1.0ms
Min. force or torque	0.10N / -
Weight	195g

Multidirectional nylon actuator with stainless steel spring
Code

PS21M-C ▲LP-T00

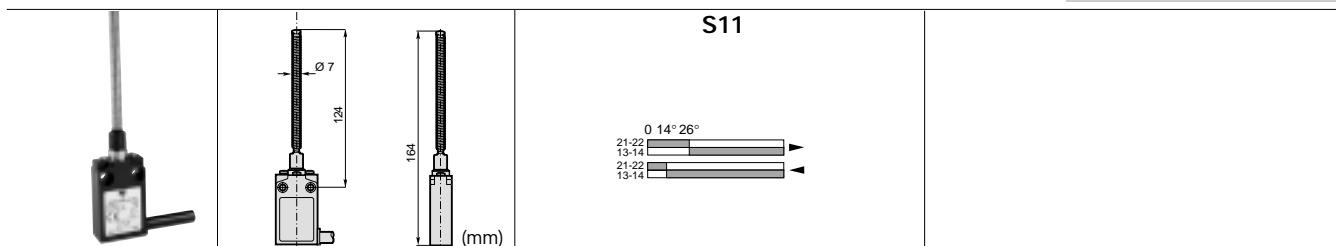


Conformity / \rightarrow (NC)	/ \rightarrow
Max. Actuation speed	1.0ms
Min. force or torque	0.10N / -
Weight	200g

Multidirectional actuator with stainless steel spring
Code


PS21M-C ▲LS-T00

Adjustment and utilization precautions

Position adjustment of lever

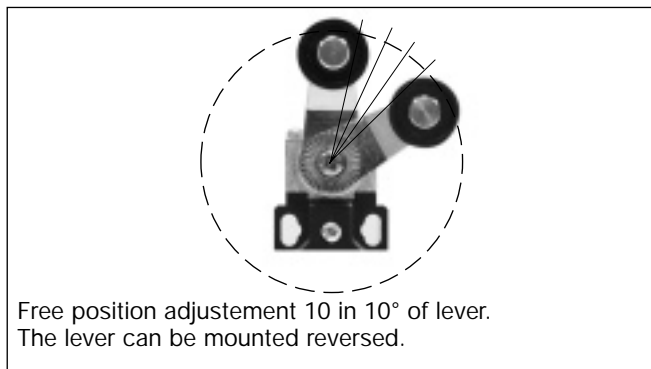

Plain plunger

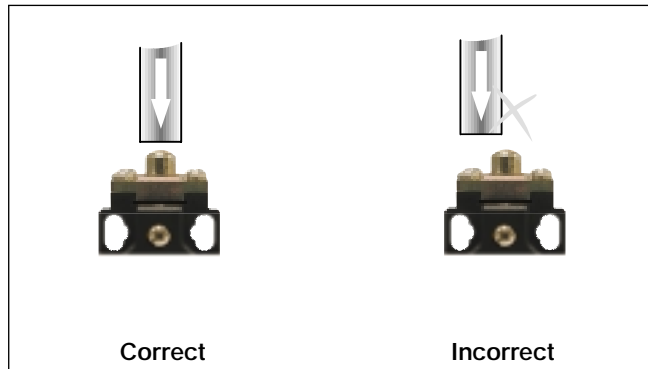

Roller plunger or Roller lever

